



# OPERATOR MANUAL

## **Fradan Truck Loader Tail Gate – Leaf Vacuum**

14 HP TailGate Model = LV- 14RS

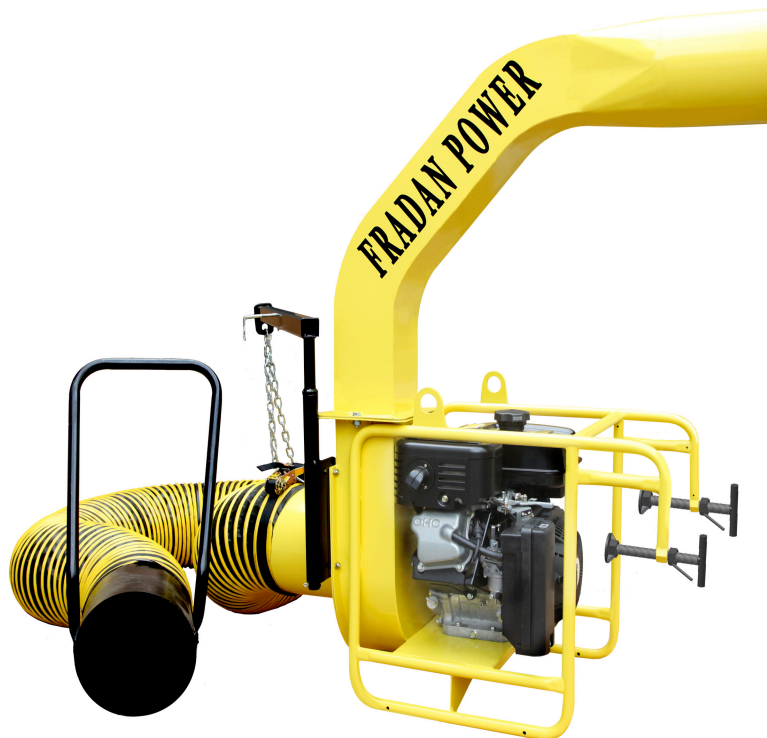

Warning  Danger  
Read instructions carefully and follow rules for safe operation.  
Failure to do so could result in serious injury.

# **Welcome to the Fradan Family**

Congratulations! You are now the owner of a quality **FRADAN TRUCK LOADER**.

Fradan manufactures a family of high performance, reliable power equipment. Our designs are based on years of personal use of landscape equipment.

We at Fradan have revolutionized the landscaping industry, offering modern, reliable, high performance equipment designed to meet today's environmental demands and exceed tomorrow's.

FRADAN built means durability, quality, maximum performance and non-obsolescence. With proper care and maintenance of your unit, we assure you years of service-free operation. This booklet refers to the information which you should learn in order to take advantage of its outstanding performance.

## **Contents**

Introduction .....	3
Technical Data .....	3
Graphic Warnings .....	4
Safety Rules and Precautions .....	4
Fuel & Oil .....	7
Engine.....	7
Preparing For Operations .....	8
Check Points Before Operation .....	8
Operating Instructions.....	9
Continuing Operating Instructions .....	10
Maintenance Instructions.....	11
Storage .....	12

*Specifications, descriptions and illustrative material in this manual are as accurate as known at the time of publication, but are subject to change without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.*

## Introduction

The **FRADAN LEAF VACCUUM** model is a ruggedly built, high performance gasoline powered unit specially designed for vacuuming leaves and debris and quickly loading them from the ground into a truck. Proper maintenance and use of the Fradan Leaf Vacuum will guarantee years of safe, service-free, reliable operation.

We wish for you to gain sufficient knowledge from this booklet before operating your Fradan, and make the best use of it in the future. We urge you to follow these instructions to assure safe and reliable operation.


## Technical Data


<b>Model</b>	LV-14RS
<b>Engine</b>	14 HP Ronin Subaru
<b>Engine Displacement</b>	404cc
<b>Starter</b>	Rope Start
<b>Fuel Capacity</b>	7.4 Quarts
<b>Vacuum Hose</b>	10in. diameter by 10ft. long
<b>Discharge</b>	8 inch
<b>Truck Mounting</b>	Tail Gate or Class III Hitch
<b>Impeller</b>	Reinforced 4 blades 1/4 inch steel
<b>Dimension (excluding intake, exhaust discharge)</b>	45 x 20 x 50 inch
<b>Hitch Class Requirements</b>	Class III
<b>Dry weight</b>	255 lbs


*\*All Specifications are subject to change without notice*


## Graphic Warnings


Because a Truck Loader uses gasoline and draws air and debris in at a high speed, safety precautions must be observed to reduce the risk of personal injury. Read this manual carefully. Be familiar with the controls and the proper use of the machine.


 Stay Alert!! This graphic accompanied by the words **WARNING** and **DANGER** calls attention to an act or condition which can lead to serious injury when you see this symbol,

 heed its Warning!

 Read & understand operator's manual and safety manual.

 Always wear eye and ear protection.

 Keep hand & feet away from air discharge areas. Rotating fan blades will cause serious injury.

 Safety Rules and Precaution. Read and fully understand




### **Safety Rules and Precautions**



*IN THE INTEREST OF SAFETY.....BEFORE STARTING ENGINE, READ AND UNDERSTAND THE ENTIRE OPERATOR'S MANUAL & ENGINE MANUAL!*


**Proper Safety precautions must be observed. Like all power equipment this unit must be handled carefully.**

Warning  Danger. To reduce the potential for accidents, comply with the safety instructions in this manual. Failure to comply may result in serious personal injury and/ or equipment and property damage.


**DO NOT EXPOSE YOURSELF OR OTHERS TO DANGER.** Follow these general rules. Do not permit others to use this machine unless they are thoroughly responsible and have read, and understand the operator's manual and are trained in its operation.


#### General Safety Rules and Precautions to Observe

- Always wear safety goggles for eye protection.
- Dress properly; do not wear loose clothing, scarves or jewelry that could become caught in moving parts of the unit. Safe, sturdy, nonskid foot wear should always be worn. Long hair should be tied back.
- Never wear loose clothing near intake hose.
- Always wear gloves to protect your hands.
- Always wear ear protectors when operating machine.
- Do not use the unit if it is damaged or poorly adjusted.
- Do not remove any shields, guards or decals. If a shield, guard or decal is damaged or does not function, repair or replace it before operating the vacuum.
- DO NOT USE** any attachment with this Leaf Vacuum other than the ones recommended by FRADAN. Serious injury to the operator or bystanders could result as well as damage to the machine.
- Do not use this unit for any job other than those for which it is intended as described in this manual.



## Continuation of Safety Rules and Precautions




- ☑ Onlookers should be kept at a safe distance from the work area, at least 100 feet/30 meters.
- ☑  **WARNING- KEEP CHILDREN, PETS, AND BYSTANDERS AWAY-** Do not permit children to contact vacuum. Keep children a safe distance from work area.
- ☑ When ever approaching an operator of the machine, carefully call his attention and confirm that the operator stops the engine. Be careful not to startle or distract the operator which can cause an unsafe situation.
- ☑ Never allow a person mentally ill, under influence of alcoholic drinks or drugs or too young in age, to operate the blower.
- ☑ Do not use the unit when you are tired or under the influence of medication, drugs or alcohol.
- ☑ Never leave the machine unattended while in operation.
- ☑ Never allow a person to ride, sit or stand on the unit or towing vehicle other than in the driver's cab of the towing vehicle.
- ☑ When operating the truck loader, operator must stay to the side of the machine, never in front or behind.
- ☑ Always keep a safe distance between two or more operators when working together simultaneously.
- ☑ Beware that the machine is loud and during normal operation it may interfere with speech communication.
- ☑ Pay special attention to operation in the rain or just after the rain as the ground may be slippery.
- ☑ **DO NOT POINT THE BLOWER OULET** in the direction of people, cars, glass, or other similar items which could be injured or damaged by blown debris.
- ☑ Do not operate during excessive vibration.

- ☑ Do not park machine on a steep grade or slope, the machine can roll away uncontrollably causing injury or damage.
- ☑ Keep the machine away from fire or spark.
- ☑ Never tamper with governor springs, governor links or other parts which may change the governed engine speed.
- ☑ Never leave the engine running while the vacuum is unattended.
- ☑ Never transport the vacuum while the engine is still running.
- ☑ Check mounting hardware daily! Beware of the possibility that the machine may overturn, fall, or tip over because of unexpected movement of the vehicle
- ☑ When starting machine and it is NOT attached to your truck, the back leg brace must be in the down position and the pins locked in place. If legs are not in down locked position and engine is brought up to operating speed, the machine will flip over.
- ☑ Never look into discharge hose.
- ☑ Keep hands away from hose inlet and discharge chute.
- ☑ Never operate unit without suction hose attached properly.
- ☑ Discharge chute should always be aimed into a closed well ventilated box.
- ☑ Never start or operate machine without intake hose clamped onto machine.




### Safety Rules and Precaution for Impeller

- ☑ **Warning Danger-** Turning off engine does not immediately stop impeller from rotating.
- ☑ **Warning Danger-** Never try to remove debris from the intake or discharge tube when engine is running or fan is rotating. .
- ☑ **Warning Danger-** If excessive vibration occurs, turn off engine, disconnect spark plug and check for lodged foreign object, damaged impeller and loose impeller bolt or key.

 **Warning Danger.** The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.




**Danger!**  **Warning danger-** If the vacuum is used improperly or safety precautions are not followed the user risks serious injury to themselves and others. Read and understand the following before attempting to operate this vacuum.



## Assembly Instructions

- A. Mounting the Vacuum Frame
  - a. Mount the vacuum frame to the frame or swing away and secure frame with four 5/16 hex head bolts ( grade five or better)
- B. Install Discharge Chute to Power unit
  - a. Install discharge chute on top of vacuum housing (Discharge chute can be installed in four different positions 90 degrees apart).
  - b. Direct discharge into receiver box of the transport vehicle
  - c. Align holes on vacuum and discharge chute, use four 3/8 x 1 1/4 bolts. Use grade 5 or better with 4 washers and locking nuts
  - d. Use a 8inch discharge hose & clamp if necessary
- C. Hose assembly
  - a. Remove suction hose from the box and stretch it
  - b. Hold the hose and stretch each end as far as possible to open internal diameter
  - c. Insert intake nozzle assembly into one of the open end of the hose, by stretching ducting and fitting the edge of the sheet metal into the hose.
  - d. Install hose clamp and tighten.
  - e. Insert hose assembly into the remaining hose opening using the technique described above.
  - f. Install second hose clamp and tighten.
  - g. Install hose cradle.
  - h. Attach chain to the hose cradle using two provided bolts and attach other end of chain to boom assembly.

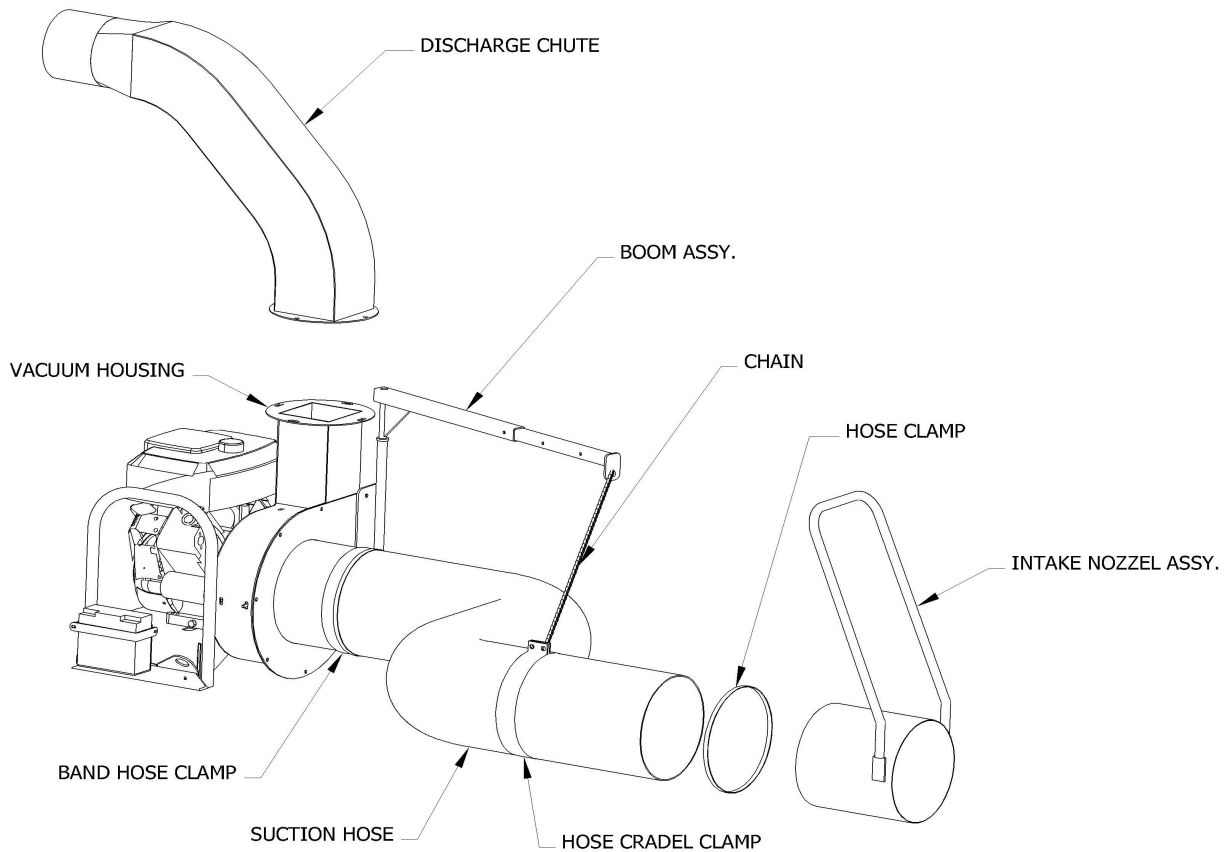



## Fuel & Oil

- Do not attempt to refuel a hot engine.
- Never fill the fuel tank to the very top.
- Never add fuel to the tank in a closed non-ventilated area.
- Do not add fuel to this unit close to an open fire or sparks.
- Be sure to wipe off spilled fuel before attempting to start engine.



All Fradan Truck Loaders are shipped  
**WITHOUT OIL**


When filling oil, refer to engine manufactures' instruction manual.

### Oil Type:

Engine: Refer to engine owners manual



### General Safety Rules and Precautions to observe for Fuel

- ☑ Do not fuel machine in an enclosed room or near open flames. Assure adequate ventilation. Outdoor refueling is recommended.
- ☑ Always store the fuel in a properly marked container that is approved by local codes and ordinances for such usage.
- ☑ Do not store in a closed area where fuel vapors can reach an open flame from hot water heaters, furnaces, etc. Store in a locked, well ventilated area only.
- ☑  When refueling, be sure to stop the engine and confirm that it is cooled down. Never refuel when the engine is running. When gasoline spills, be sure to wipe it up completely dispose of those materials before starting the engine.
- ☑ Do not smoke while handling fuel or filling tank
- ☑ Fuel should always be stored in an approved, clearly marked container.



## Engine

See your engine manual for proper engine prep and operation.




### Safety Rules and Precautions pertaining to Engine

- ☑ Never remove the tank cap while the engine is running.
- ☑ Never start or run the engine inside a closed room or building. Fumes from the exhaust contain dangerous carbon monoxide.
- ☑ Never attempt to make engine adjustments while the unit is running. Always make engine adjustments with the unit resting on a flat, clear surface.
- ☑ In start-up or during operation of the engine, never touch hot parts such as the muffler, the high voltage wire or the spark plug.
- ☑ After the engine has stopped, the muffler is still hot. Never place the machine in any places where there are flammable materials (dry grass, etc.), combustible gases or combustible liquids.
- ☑ Do not choke carburetor to stop engine. To properly stop the engine, gradually reduce engine speed to an idle, allow two minutes for the engine to cool down and then use appropriate switch to stop the engine.
- ☑ Never tamper with the engine speed selected by the engine manufacturer.
- ☑ Do not operate engine without a muffler. Inspect periodically and replace, if necessary.
- ☑ Do not operate engine with an accumulation of grass, leaves, dirt or other combustible material in the muffler area.
- ☑ Never run engine at excessive speeds. This may result in injury and/ or damage to unit.
- ☑ Do not use this engine on any forest covered, brush covered, or grass covered unimproved land unless a spark arrester is installed on the muffler. The arrester must be maintained in effective working order by the operator. In the state of California the above is required by law (section 4442 of the California Public Resources Code). Other states may have similar laws. Federal laws apply on federal lands.
- ☑ Do not run engine without air cleaner or air cleaner cover.

## Preparing For Operations



Be Sure Truck loader is Fully Assembled!  
Never operate Loader without all guards and deflectors in place.  
Ensure that all nuts, bolts, screws are installed and properly tightened.



Handle Fuel with Care. It is highly flammable. Fueling a hot engine or fueling an engine near an ignition source can cause fire and result in serious personal injury and/ or property damage.



- Inspect the entire machine for loose parts (nuts, bolts, screws, etc.) and any damage. Repair or replace as necessary before using the machine.
- Clean the machine completely, especially, the fuel tank, its surrounding, and the air cleaner.
- When preparing fuel, use only the amount needed for the job you are to do. Do not use fuel that has been stored longer than two months. Fuel stored longer than this will cause hard starting and poor performance. If fuel has been stored longer than this time, it should be removed and filled with fresh fuel.

### Check Points Before Operation



1. Check for loose bolts, nuts and fittings.
2. Check the air cleaner for dirt. Clean the air filter of all dirt, debris etc. before operation.
3. Check to be sure air intake screen on engine is securely in place and clean.
4. Check oil level.
5. Check that unit has been removed of all debris, leaves, grass, dirt etc.
6. Check to make sure hose is securely attached (clamped tight) to unit.
7. Check to make sure discharge chute will be discharging into a well ventilated enclosed box.

For all machines with or without wheel kit (including Tail Gate Truck Loader)- Never look into discharge hose. Never start or operate machine WITHOUT INTAKE HOSE

CLAMPED ONTO MACHINE!!!!!!!!!!

\* Avoid wearing loose clothing near intake hose.

\* Safety glasses should always be worn when operating machine.




Warning: This unit is designed to be used in conjunction with debris collection box. Never run or operate your Truck Loader without a debris box. Make sure the receiver box is strong enough to withstand a high velocity and force of the incoming debris.





Warning: Vacuuming sand, ice, rocks and hard litter will affect longevity of this machine and can cause damage to parts.







## Operating Instructions

 Like all mechanical tools, reasonable care must be used when operating machine. Inspect machine work area and machine before operating. Making sure that all operators of this equipment are trained in general machine use and safety.

- Pay attention to loosening and overheating of parts. If there is any abnormality of the machine, stop operation immediately and check the machine carefully. If necessary, have the machine serviced by an authorized FRADAN dealer. Never continue to operate a machine which may be malfunctioning.

	<p style="text-align: center;"><b>WARNING DANGER</b> Never attempt to remove leaves or other debris from any part of the Truck Loader while it is running.</p>	
---	--	---

	<p style="text-align: center;"><b>WARNING DANGER</b> Do not smoke while handling fuel. Do not refuel a hot or running engine. Do not fill tank indoors. Caution- Do not start or run engine indoors as poisonous carbon monoxide is emitted. Do not operate in un-ventilated area.</p>	
---	--	---

	<p style="text-align: center;">The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.</p>	
---	---	---

### To Start the Engine

1. Check oil level
2. Turn fuel shut- off valve to “open”
3. Put choke control to “choke” position
4. Move throttle control to “fast”
5. Push on/ off electrical rocker switch located on the left side of the engine to “on” position
6. Turn Key clock wise until engine starts
7. Grasp rope handle. Pull slowly until resistance is felt, then pull rapidly to start engine
8. Let engine warm up. Slowly adjust choke toward ‘run” position.

### Vacuuming

1. With machine fully assembled and running, hold the handle of the intake nozzle and move intake nozzle in sweeping motions over debris
2. OR place nozzle on the ground and rake the debris in the direction of the nozzle opening. Nozzle can be close to debris but do not block airflow into the nozzle

### To Stop the Engine

1. Move the throttle control lever to the slow position
2. Turn the key to the off position

## Continuing Operating Instructions

### Remove Debris blockage-


If operator experiences a decrease in suction, there may be a debris blockage in the hose or housing.

### Removing Debris Blockage In hose

1. Simply grab the handles of the Intake Nozzle and stretch the hose out into a straight line with respect to the inlet of the unit while the engine is at full throttle.

### Removing Debris Blockage In hose

If decreased suction occurs after completing the step above there may be a blockage in the housing. In order to inspect the unit for blockages, complete the following steps:

1. Turn off the engine and wait until all moving parts have come to complete stop.
2. Disconnect the spark plug wires from the spark plugs on the engine
3. Remove the Hose Assembly from the Inlet Assembly. With the hose off remove any debris that is clogging the housing.
  - a.  Caution should be used when clearing debris from inside the housing. Gloves should be worn as sharp edges on the fan and sharp debris such as glass or ripped aluminum may be present.
4. Inspect the discharge chute for debris and remove any debris clogging the area.
5. In order to re-assemble the removed parts, please refer to the assembly Instructions found in this manual. After the unit is re-assembled, reconnect the spark plug wires and resume operation.

### Helpful Hints

- This machine has been designed for two methods of vacuuming debris.
  1. The operator firmly grasps the handle of the Intake Nozzle and move the Nozzle back and forth in a sweeping motion over the debris.
  2. Lay Intake Nozzle horizontally on the ground. By placing the nozzle in this position, debris can be raked into the Nozzle by the operator.
- While large amount of debris can be vacuumed quickly with this machine, caution must be taken to avoid blocking the airflow into the nozzle.
- Periodically rotating the Intake Nozzle with respect to the Hose will allow hose to wear more evenly, increasing the life of your hose.
- To save time and effort, gather debris into piles so unit can collect debris more efficiently.
- To get maximum performance out of unit we recommend the following:
  - o Dry Debris
    - Run engine at approximately half throttle; this will help reduce excessive wear and tear on unit
  - o Frozen debris and rocks may NEVER be vacuumed up will cause damage to the machine
  - o Wet Debris
    - Run engine at full throttle

### Preparing the Unit for Transportation Without Wheel Kit

1. Make sure the engine is off
2. Turn fuel valve in the off position
3. Attach the carabineer to the chain link closet to the boom arm assembly
4. Make sure the hose is approximately 2 feet from the ground. This will prevent the hose from rubbing on the street and damaging the hose.
5. Make sure the hose nozzle is properly attached to the discharge hook ( if necessary, use bungee cord to secure it)
6. Attach two chains or straps to anchoring holes located on frame tubing, then attach other end on suitable area of truck. Tighten straps or cahins prior to transport.
7. Do not exceed 35 M.P.H when transporting the truckloader.



### Maintenance Instructions

 **Any adjustments needed should be performed by a qualified mechanic and made while engine is not running.**


#### General Maintenance

Before proceeding to adjust or repair the machine, be sure to stop the engine and detach all spark plug caps from the spark plugs. (Remember there are multiple spark plugs)

While engine is not running:

1. Clear intake screens on housing and engine throughout use.
2. Keep the blower, drive train and especially the engine air screen and cooling fins clean and free of grease, grass and leaves to reduce the chance of fire and to permit proper cooling.
3. Inspect machine for loose bolts before starting the engine. Repair or replace worn, damaged or missing components promptly.
4. Use only recommended parts, fluids and lubricants specified by engine manufacture. See engine manual.
5. Check at regular intervals and maintain tire air pressure according to pressure indicated on tire sidewall if equipped with wheel kit.
6. **Keep air filters clean.** Always refer to engine manual regarding engine maintenance.

NOTE: Lead –acid batteries generate hydrogen and oxygen gases which form an explosive mixture. Keep sparks and flames away at all times.



#### Safety Rules and Precautions for Maintaining Unit

- Use only Fradan original equipment parts when servicing the unit. This will ensure safe and proper performance of your product. These parts are available from your dealer. The use of any other

accessories or attachments may cause a potential hazard or injury to the user, damage to the machine and void this warranty.

- ☑ Make periodic inspections to assure safe and efficient operation. For a thorough inspection of your machine, please contact a FRADAN dealer.
- ☑ Never change attachments or make any adjustments, repairs or replacements until the unit is completely shut down and the battery is disconnected.



**Use only a qualified mechanic for any adjustments, disassembly, or any kind of repair**



## Storage

Never store engine indoors or in enclosed poorly ventilated areas with fuel in tank, where fumes may reach and open flame, spark or pilot light, as in furnace, water heater, clothes dryer or other gas appliance.

It is recommended to disconnect battery when storing unit.

When the machine is placed in storage for a long time, drain fuel from the fuel tank and carburetor, clean the parts, move the machine to a safe place and confirm that the engine is cooled down.

If engine is to be unused for 60 days or more, prepare as follows:

- Be sure engine is cool. Do not smoke. Remove all gasoline from carburetor and fuel tank to prevent gum deposits from forming on these parts and causing possible malfunction of engine. Drain fuel outdoors, into an approved container, away from open flame. Run engine until fuel tank is empty and engine runs out of gasoline
- Note: Fuel stabilizers may be used, refer to engine manufacture's owners manual.

**Fradan Manufacturing Corp.**  
**[www.fradanpower.com](http://www.fradanpower.com)**